

A class better!



Microdot Marking

The innovative, multi-purpose Microdot:

- * **All-In-One device: Sturdy, reliable, compact, professional**
- * **PC controlled**
- * **Logos & Graphics**
- * **Date & serial numberings with pre- and suffix function**
- * **Wide range of fonts**
- * **Linear, circular and angular tags**
- * **Marking area 100 x 50 mm**
- * **Optionally available as "portable Version"**
- * **Perfect Results**





Marking area x / y	100 x 50 mm
Height adjustment	310 mm
Marking speed	1 mm/s to 50 mm/s, 1 char/s 3 mm height
Traverse speed	max. 80 mm/s
Marking resolution	0,1 mm both x/y axes
Character height	from 1 mm freely editable
Stylus frequency	0 - 100 Hz
Impact force	adjustable
Height compens. of needle	max. 5 mm
Air requirements	100 l/min
Working pressure	max. 6 bar
Dimensions (L x W x H; mm)	
Marking head	149 x 198 x 173
Column and base	380 x 260 x 680
approx. Weight in kg	
Marking head	5
Column and base	8,8
Supply	90 - 265 VAC 50/60 Hz
Memory	1 MB Flash / 1 MB RAM
Font	DIN 1451m, further ones on request
Formats	Linear, angular and circular text, date, counter with pre- and suffix function
Power consumption	20 VA

Accessories

Software “Schillmarker 2”

New graphic interface for easy usage

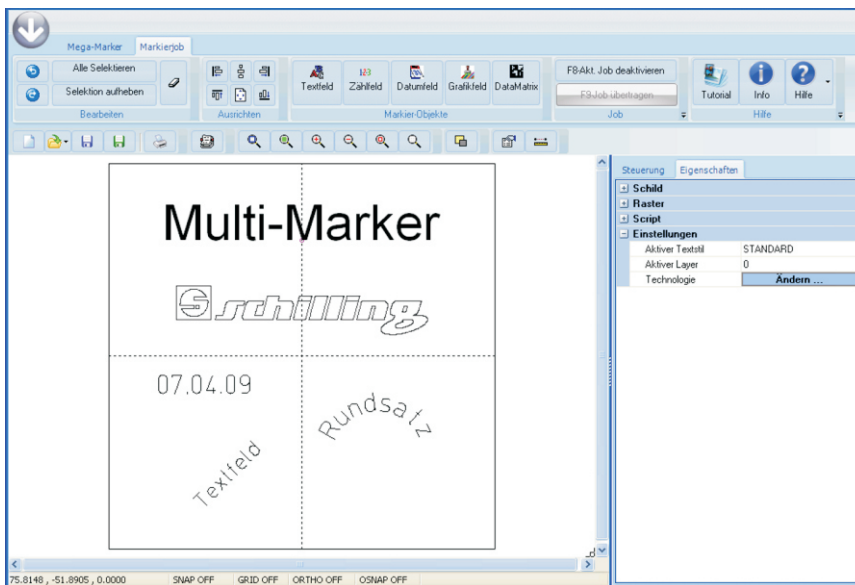

Portable Version

(optional)

With display, handles and ground plate, incl. prism